
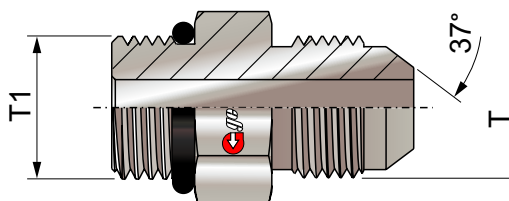




Hydraulic Fittings



Type – Thread T	Size	For quotation: Specify thread T and thread T1
7/16-20 UNF	-4	Thread T according to SAE J514 – JIC
1/2-20 UNF	-5	Thread T1 according to the table below
9/16-18 UNF	-6	
3/4-16 UNF	-8	
7/8-14 UNF	-10	
1.1/16-12 UN	-12	
1.3/16-12 UN	-14	
1.5/16-12 UN	-16	
1.5/8-12 UN	-20	
1.7/8-12 UN	-24	

Type O	Type C	Type WD
ISO 6149-2 / -3 Metric Thread	DIN 3852-2 - BSPT Thread	ISO 1179-2 - BSP Thread
ISO 11926-2 / -3 UNF Thread	ANSI / ASME B1.20.1-1983 - NPT Thread	ISO 9974-2 - Metric Thread
		


Coding Example:

CRJ 7/16 UNF x C 1/4 NPT (Straight JIC 37° fitting, 7/16-20 UNF thread x 1/4 NPT, sealing type Form C).




For AISI 316 stainless steel, add the letter I at the end of the code.

For Viton (FKM) or EPDM seals, add the letter V or E at the end of the code.

If you require a different adapter configuration not listed in this catalog, please contact our Technical Department.

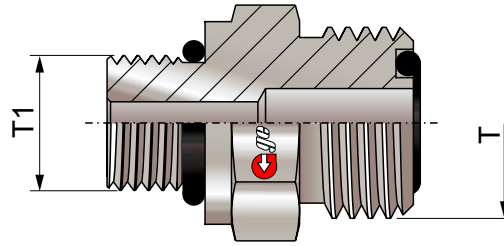

Type – Thread T	Size	For quotation: Specify thread T and thread T1
9/16-18 UNF	-4	Thread T according to ISO 8434-3 – ORFS
11/16-16 UN	-6	Thread T1 according to the table below
13/16-16 UN	-8	
1-14 UNS	-10	
1.3/16-12 UN	-12	
1.7/16-12 UN	-16	
1.11/16-12 UN	-20	
2-12 UN	-24	

Type O	Type C	Type WD
ISO 6149-2 / -3 Metric Thread	DIN 3852-2 - BSPT Thread	ISO 1179-2 - BSP Thread
ISO 11926-2 / -3 UNF Thread	ANSI / ASME B1.20.1-1983 - NPT Thread	ISO 9974-2 - Metric Thread
		


Coding Example:

CRFS 9/16 UNF x C 1/4 NPT (Straight ORFS fitting, 9/16-18 UNF thread x 1/4 NPT, sealing type Form C).

For AISI 316 stainless steel, add the letter I at the end of the code.

For Viton (FKM) or EPDM seals, add the letter V or E at the end of the code.

If you require a different adapter configuration not listed in this catalog, please contact our Technical Department.



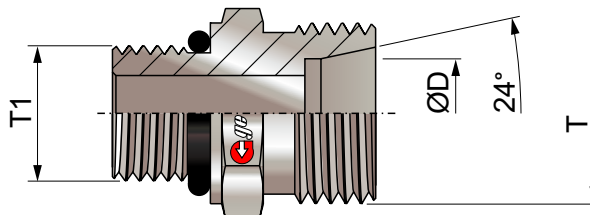


Series L		Series S	
Type – Thread	T D (Tube)	Type – Thread	T D (Tube)
M12x1,5	6	M14x1,5	6
M14x1,5	8	M16x1,5	8
M16x1,5	10	M18x1,5	10
M18x1,5	12	M20x1,5	12
M22x1,5	15	M22x1,5	14
M26x1,5	18	M24x1,5	16
M30x2	22	M30x2	20
M36x2	28	M36x2	25
M45x2	35	M42x2	30
M52x2	42	M52x2	38

For quotation: Specify thread T and thread T1

Thread T according to DIN 2353

Thread T1 according to the table below

Type O	Type C	Type WD
ISO 6149-2 / -3 Metric Thread	DIN 3852-2 - BSPT Thread	ISO 1179-2 - BSP Thread
ISO 11926-2 / -3 UNF Thread	ANSI / ASME B1.20.1-1983 - NPT Thread	ISO 9974-2 - Metric Thread
		

Coding Example:

CRDIN 8L x WD G1/4 BSP (Straight DIN 2353 fitting, M14x1.5 thread, tube Ø8, Series L x 1/4 BSP, sealing type Form WD).


For AISI 316 stainless steel, add the letter I at the end of the code.

For Viton (FKM) or EPDM seals, add the letter V or E at the end of the code.


If you require a different adapter configuration not listed in this catalog, please contact our Technical Department.




Manufacturing Facility


 + 55 15 3264-1222

 gepef@gepef.com.br


 www.gepef.com.br


 Avenida do Trabalhador, 1.680
ZIP Code 18552-100 - Boituva - SP
Brazil

Head Office & Operations Center


 Av. Antônio Ângelo Amadio 681
ZIP Code 18552-112 - Boituva - SP
Brazil

Branch Office – Belo Horizonte, MG – Brazil - Regional sales operations
for Minas Gerais and Brazil's Central-West Region

 + 55 31 3327-4459

 gepef-bh@gepef.com.br

 www.gepef.com.br

 Avenida Professor Mário Werneck, 300
(10th Floor – Room 1004 – Tower 2) – Estoril District
ZIP Code 30455-610 - Belo Horizonte - MG
Brazil